



## HLM-2460W 24-inch HDTV/SDTV Full HD Pixel Multi-format LCD Color Monitor

**HDMI™ HDR**




The HLM-2460W has a 24-inch Full HD 1920x1200 Pixel 400cd/m<sup>2</sup>, 10-bit resolution LCD panel. This model offers very narrow front-to-back dimensions, light weight and low power consumption. Multi-format SDI, 3G-SDI, HDMI and VBS inputs are provided as standard. By employing a Full 1920x1200 pixel LCD panel which has wide viewing angle, high brightness, high contrast, fast motion response, and high quality colour reproduction, the HLM-2460W achieves real pixel allocation without resizing. Its superb gradation characteristics also make it ideal for a wide range of broadcast applications, including use in monitor walls.

<b>24-inch Full HD</b>	<b>WUXGA (1920x1200 pixel)</b>	<b>66W</b>	<b>Viewing Angle 178degree(H/V)</b>	<b>Contrast Ratio 1500:1</b>	<b>AC-Input</b>
<b>VBS Input</b>	<b>3G/HD/SD(4:2:2)-SDI Input(max.4 Input)</b>	<b>Embedded Audio Meter</b>	<b>Analog Audio 2ch Input</b>	<b>5.1ch Surround Down-mix</b>	<b>HDMI</b>
<b>4:3/16:9</b>	<b>Remote (Parallel)</b>	<b>Remote (Mouse)</b>	<b>Remote (RS485)</b>	<b>Remote (Wireless)</b>	<b>Marker</b>
<b>10-Color temperature-memory</b>	<b>Stereo Speaker</b>	<b>Stereo Headphone</b>	<b>VITC/LTC Display</b>	<b>WFM Monitoring Display</b>	<b>User Marker (12 scenes)</b>
<b>UMD/IMD Display</b>	<b>Wipe Display</b>	<b>P in P Display</b>	<b>Split/Full Screen Comparison</b>	<b>4 Times Zoom</b>	<b>Shadow</b>
<b>W562x398x86mm (*22.1x15.7x3.4 inches)</b>	<b>9.1kg (20.1 lbs)</b>				<b>7-Test Signal Generator</b>
					<b>Mix Test Signal</b>
					<b>Mouse Menu Control</b>
					<b>Split Screen</b>
					<b>Dot-by-Dot Display</b>
					<b>Vector Scope Display</b>
					<b>USB Memory (Data/Picture)</b>
					<b>Closed Caption</b>
					<b>Ethernet</b>
					<b>HDR (Option)</b>
					<b>Auto * Calibration</b>

## HLM 60series Connector Panel


● For field use

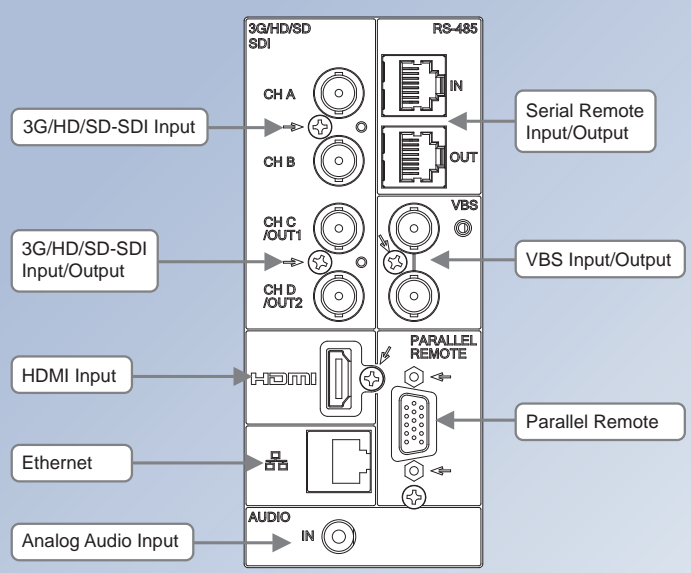

### HLM-960WR

BB-904V/BB-904A battery brackets come with a handle. (Handle only :GR-904 / Option).

DC Input DC 12V  
AC Input AC100-120V AC200-240V

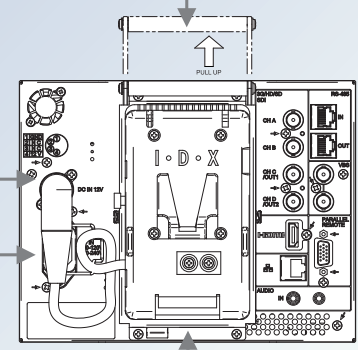

BB-904V/BB-904A battery brackets (Option)