



MODEL NO.

5.5" FHD CAMERA-TOP MONITOR

Specific Monitor by LILLIPUT with Broadcast Quality for Full HD Camcorder & DSLR Application for CCTV Monitoring & Making Movies.



Excellent Display

It features 5.5" 16:9 IPS panel with 1920x1080 full HD resolution (401ppi), 1000:1 high contrast, 160° wide viewing angles, 450cd/m² high brightness, which offers outstanding viewing experience.



Durable Protection

Metal housing with silicon rubber case, which provides a perfect protection from shock and drop. It's also convenient for applications in complex outdoor environment when accompanying with sun shade.



Cross Conversion

The HDMI output connector can actively transmit an HDMI input signal or output an HDMI signal that has been converted from an SDI signal. In short, signal transmits from SDI input to HDMI output and from HDMI input to SDI output.




Advanced Functions

Lilliput creatively integrated column (YRGB peak), time code, waveform, vector scope & audio level meter into field monitor. These assist users to accurately monitor when shooting, making and playing movies/videos.



Slim & Portable Design

Slim and light weight design with hot shoe mounts, which are available for a 5.5 inch monitor fixed on the top of DSLR camera and camcorder.

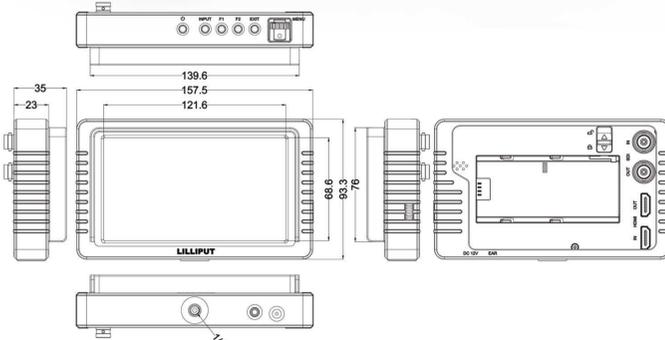

SPECIFICATIONS | ACCESSORIES

DISPLAY	Panel	5.5" IPS	SDI Format	SMPTE-125M	480i(59.94)	ACCESSORIES	1. Silicon rubber case	1 piece	
	Physical Resolution	1920×1080 (401ppi)		1080i(60/59.94/50)	2. Folding sun shade cover		1 piece		
	Aspect Ratio	16:9		SMPTE-274M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)		3. 12V DC adapter	1 piece	
	Brightness	450cd/m ²		SMPTE-292M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)		4. HDMI A/C cable	1 piece	
	Contrast	1000:1		SMPTE-296M	720p(60/59.94/50/30/29/25/24/23.98)		5. Shoe mount	1 piece	
INPUT	Viewing Angle	160° / 160° (H/V)	HDMI Format	720p(60/59.94/50)	ACCESSORIES	6. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces		
	3G-SDI	1		SMPTE-372M		1080i(29.97/25/24/23.98)	7. Manual	1 copy	
OUTPUT	HDMI	1		1080p(60/59.94/50/30/29.97/25/24/23.98)		-Level A & Level B	720p(60/59.94/50/30/29.97/25/24/23.98)	8. Battery (optional)	1 piece
	3G-SDI	1		SMPTE-425M-AB		1080p(60/59.94/50)	ITU-R BT 656	576i(50)	
AUDIO	HDMI	1		-Level B 2x		1080i(60/59.94/50)			
	Speaker	1	ITU-R BT 656	576i(50)					
POWER	Ear Phone Slot	1							
	Current	1A							
ENVIRONMENT	Input Voltage	DC 7-24V							
	Battery Plate	F-970 / QM91D / DU21 / LP-E6							
DIMENSION	Power Consumption	12W							
	Operating Temperature	-20℃~60℃							
	Storage Temperature	-30℃~70℃							
	Dimension(LWD)	154.5×90×20mm / 157.5×93×23mm (with case)							
	Weight	320g / 340g (with case)							

Note: Due to constant effort to improve products and product features, specifications may change without notice.

