

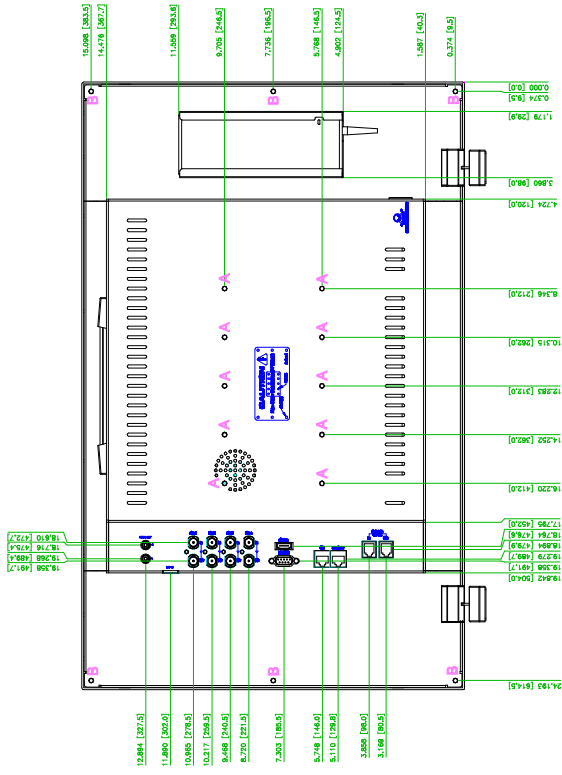
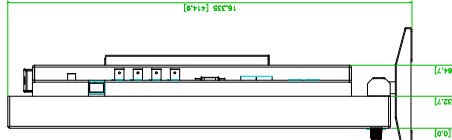
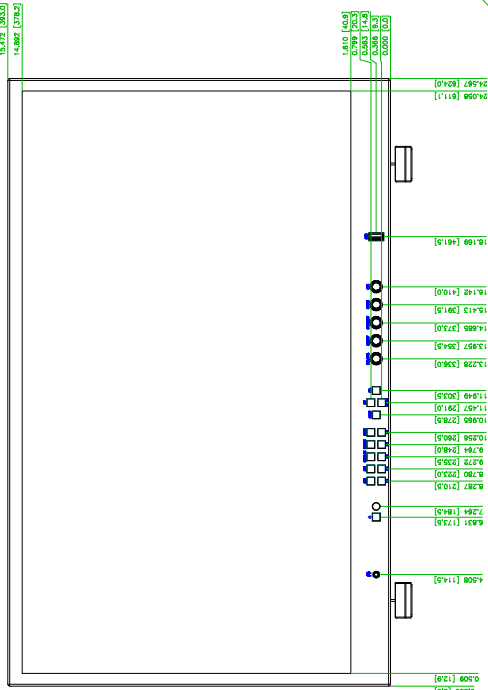


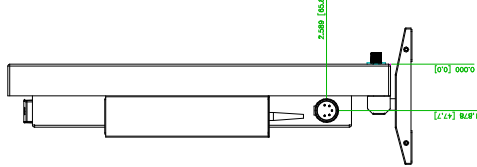


- 4K 12G SDI Single or QuadLink with looping outputs, and HDMI 2.0
- Quad Link Display (Square Division, 2 Sample Interleave)
- HDMI inputs accepts up to 2160p, HDMI 2.0, supporting HDCP
- High Dynamic Range (HDR) Formats: PQ-2084, Hybrid Log Gamma, S-Log3
- Monitor Remote Control via: IR, Ethernet, GPI, RS-422, and RS-232
- Waveform & Vectorscope, and up to 16 Audio Channels Bar Graphs with DeEmbedder
- Custom 3D LUT file Import through USB by Menu
- USB Firmware Upgrades
- Peaking filter & False color
- Time code, Closed Caption 608, 708, UMD displays
- Markers • H/V Flip functions • Blue/Mono • H/V delay
- Aspect Ratios • 3 Color Tally Lamps • Aluminum Cabinet
- Light weight • Carrying Handle • Tilting Feet • Anti-Glare

<b>SPECIFICATIONS</b>	
<b>Active Area (Diagonal)</b>	26.9" / 683 mm
<b>MODES</b>	
<b>High &amp; Standard Definition Video Modes</b>	4096x2160 (23.98/24/25/29.97/30/50/59.94/60p), 3840x2160 (23.98/24/25/29.97/30/50/59.94/60p) Native Support 2048x1080p (23.98/24), 1920x1080p (23.98/24/25/30pSF, 23/24/25/29/30p) Native Frame Rate Support 1920x1080i (50/59.94/60), 1280x720p (24/25/30/50/59.94/60p), 480i (59.94i), & 576i (50i) Native Frame Rate Support HDMI: 480p / 720p / 1080p / 2160p All in their Native Frame Rates
<b>INPUTS</b>	
<b>Digital Video Inputs (SDI)</b>	12G/3G/HD/SD SDI; SMPTE ST 2082-10/ SMPTE ST424&425/ SMPTE 292M/ SMPTE296M/ SMPTE125/ ITU-R BT656. (Single or Quad Link; DualLink not supported)
<b>Digital Video Input (HDMI)</b>	Up to 2160p HDMI (in 3840x2160 & 4096x2160, 4:2:0 Color also supported)
<b>PICTURE</b>	
<b>Aspect Ratios</b>	Full Screen, 16:9, 4:3, 14:9, 13:9, 1.85:1, 2.85:1, Pixel to Pixel
<b>Pixel RGB Trio, Pitch, Depth, Colors</b>	3840Hx2160V UHD Pixel Array (16:9); 0.155 mm x 0.155 mm; True 10 bit 1.073 Billion colors
<b>Gamut</b>	99% DCI P3, 78% 2020 coverage
<b>Brightness, typical</b>	540 cd/m <sup>2</sup> Peak
<b>Contrast Ratio</b>	1,000,000 : 1 (min)
<b>Color Processor</b>	10 bit Color Processor, 1.073 Billion colors on screen
<b>Viewing Angle, contrast&gt;10</b>	R/L 178°, U/D 178° (Typ)
<b>Panel Response Time; Latency</b>	Panel: 0.1 ms (t <sub>r</sub> +t <sub>d</sub> ); 1 frame (16.8/21.2 ms [p60/p48])
<b>CONTROLS</b>	
<b>User Controls</b>	15 direct buttons: On/Standby, SDIs, SFP, 2SI, QUAD, HDMI, F1~5, Menu, SEL/Input, Up, Down, 5 Knobs Adjust
<b>Remote Controls</b>	IR, TCP/IP, RS-422, RS-232, GPI
<b>LIGHT</b>	
<b>Light Source</b>	OLED Direct-View Display (4 <sup>th</sup> Generation)
<b>LED Lifetime</b>	30,000 hrs, min
<b>CONNECTORS</b>	
<b>Video Connectors, BNC</b>	BNCx8: SDI 1&2 12G & Loops; SDI 3&4 3G SDI & Loops for Quad UHD Input; SD/HD/UHD
<b>Video Connectors, SFP</b>	SFP Cage, MSI, SD/HD/UHD
<b>HDMI Connectors</b>	HDMI Type A19x1, up to HDMI 2.0 signals
<b>POWER</b>	
<b>DC Power</b>	24 VDC ±10%, 67W max
<b>DC Connector</b>	XLR-5M (pins 1&2=Gnd, pins 4&5=+Volts)
<b>AC Power (detachable power supply included)</b>	90-264 VAC, 50/60 Hz
<b>AC Power Connector</b>	IEC 320-C14 3 pin grounded male inlet
<b>DISPLAY</b>	
<b>Window (Display Area)</b>	23.47 x 13.99" / 596 x 355mm
<b>Cabinet Dimensions</b>	24.57 x 15.47 x 2.55" / 624 x 393 x 65mm (exclusive of power supply)
<b>Weight</b>	11.7 lb / 5.3 kg
<b>Operating (full spec)</b>	0 ~ +50°C, non-condensing, 0 ~ 10,000 feet (3,048m)
<b>Storage</b>	-20 ~ +60°C, non-condensing, 0 ~ 40,000 feet (12,192m)

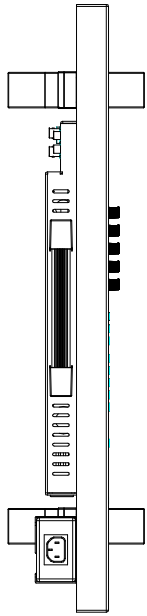

**NOTE:**  
REMOVABLE TILTING FEET

MARK	TABLE OF FASTENERS	QTY	DEPTH MAX
A	M5 INSERTS (100mm VESA)	10	0.472"/12 mm
B	10-32 UNC INSERTS (MOUNTING)	6	0.472"/12 mm

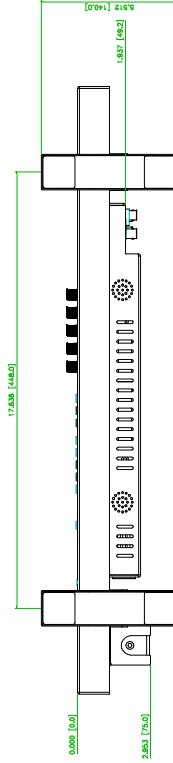

**NOTE: MOUNT MONITOR WITH A OR B HOLES ONLY**